



Ultra HD 4K PTZ Camera – ATDSC UV430

UV430 Ultra HD 4K camera is featured with advanced ISP processing technology and algorithm to provide high quality image and smooth motion.

It supports H.264/H.265 encoding which makes motion video more fluent and clear under low bandwidth conditions.



Key Features:

- **4K Ultra HD**
1/2.5 inch high quality 4K CMOS sensor; 8.51 megapixel, resolution is up to 4K (3840x2160) @60fps and compatible with 1080P, 720P and other resolutions.
- **Optical Zoom Lens**
12X optical zoom lens, 81° FOV without distortion.
- **Leading Auto Focus Technology**
Advanced and leading algorithm enables the camera auto focus fast and accurately.
- **Low Noise and High SNR**
Low noise CMOS ensures super high SNR image. The advanced 2D/3D noise reduction technology reduces the noise while ensuring high image clarity.
- **Multiple Video Outputs:**
HDMI, USB3.0 and LAN support audio video output
- **Multiple USB Compression Encoding Format:**
YUY2, MJPEG, H.264, NV12 video encoding formats
- **Multiple Audio Compression Standard**
Audio-in supports AAC, MP3 and G.711A audio compression; 8000, 16000, 32000, 44100, 48000 sampling frequency
- **Multiple network protocol**
Supports ONVIF, GB/T28181, RTSP, RTMP protocols; RTMP push mode, easy to be connected to streaming server (Wowza, FMS); RTP multicast mode; VISCA control protocol
- **Control Interface**
RS422 (compatible with RS485); RS232 in & out; RS232 cascade connection
- **Multiple Control Protocol**
Support VISCA, PELCO-D, PELCO-P protocols; Support automatic identification protocols.
- **Multiple preset**
Up to 255 presets (10 presets for remote control).
- **Multiple Applications**
Online-education, Lecture Capture, Broadcasting, Video conferencing, Tele-medicine, Unified Communication, Emergency command and control systems, etc.

Technical Specifications:

Model	UV430A	
Optical Zoom	12X	
FOV	Horizontal: 7.59° (tele) ~ 81° (wide) vertical: 4.6° (tele) ~ 50.0° (wide)	
Aperture	F1.8 - F3.56 ± 5%	
Image Sensor	1/2.5 Inch 4K CMOS Sensor	
Effective pixels	8.51M; 16:9	
Video Format	HDMI Video Output Format: 4KP60, 4KP50, 4KP30, 4KP25, 1080P60, 1080P50, 1080i 60, 1080i 50, 1080P30, 1080P25, 720P60, 720P50 USB3.0 Video Output Format: YUY2/NV12: 1920×1080P30, 1280×720P30, 1024×576P30, 960×540P30, 800×448P30, 640×360P30, 640×480P30, 320×176P30 MJPEG/H.264: 1920×1080P30, 1280×720P30, 1024×576P30, 960×540P30, 800×448P30, 640×360P30, 640×480P30, 320×176P30 USB3.0 downward compatible USB2.0: YUY2/NV12: 640×360P30, 640×480P30, 320×176P30 MJPEG/H.264: 3840×2160P30, 1920×1080P30, 1280×720P30, 1024×576P30, 960×540P30, 800×448P30, 640×360P30, 640×480P30, 320×176P30	
Minimum Illumination	0.05Lux (F1.8, AGC ON)	
DNR	2D & 3D DNR	
White Balance	Auto / Manual/ One Push/ Specified Color Temperature	
Focus	Auto / Manual/ One Push	
exposure mode	Auto/ Manual / Shutter Priority / Aperture Priority / Brightness priority	
Aperture	F1.8 - F11, CLOSE	
shutter speed	1/25 - 1/10000	
BLC	OFF/ON	
Dynamic range	OFF/ Dynamic Level Adjustment	
Video Adjustment	Brightness, Color, Saturation, Contrast, Sharpness, B/W mode, Gamma curve	
SNR	≥50dB	

Interface Features	
Interfaces	HDMI, LAN(POE), USB3.0 (Type B, compatible with USB2.0), A-IN, RS232-in & out; RS422 (Compatible with RS485), Dial switch, DC12V, Power Switch
Video Compression	LAN: H.264, H.265 USB 3.0: MJPG, H264, YUY2, NV12
Audio-in Interface	Double track 3.5mm linear Input
Audio out	HDMI, LAN, USB3.0
Audio Compression	AAC, MP3, G.711A
LAN	10M/100M/1000M adaptive Ethernet port, support POE and audio/video output
Network Protocol	RTSP, RTMP, ONVIF, GB/T28181, VISCA Control Protocols, Remote Upgrade, reboot and reset
Control Interface	RS232-IN, RS232-OUT, RS422 (RS485)

Serial Protocol	VISCA/ Pelco-D / Pelco-P; Baud rate: 115200/38400/9600/4800/2400
USB Communication Protocol	UVC (video) , UAC (audio)
Power Interface	HEC3800 (DC12V)
Power Adapter	In: AC110V-AC220V ; Out: DC12V/2.5A
Input Voltage	DC12V±10%
Input Current	<1A
Power Consumption	<12W


PTZ Parameters	
Pan Rotation	-170°~+170°
Tilt Rotation	-30°~+90°
Pan Control Speed	0.1°/s~120°/s
Tilt Control Speed	0.1°/s~80°/s
Preset Speed	Pan: 120°/s, Tilt: 80°/s
Preset Number	255 Presets (10 presets by remote control)

Other Parameters	
Storage Temperature	-10°C ~ +60°C
Storage Humidity	20%~95%
Working Temperature	-10°C ~ +50°C
Working Humidity	20%~80%
Dimension	220mm (L) × 144mm (W)× 159mm (H)
Usage	1.7 kg
Storage Temperature	Indoor

Accessories	
Standard	Power supply and adapter,RS232 Cable,USB3.0 Cable, IR remote control, User Manual
Optional	Wall / Ceiling Mount



Dimension: (unit: mm)

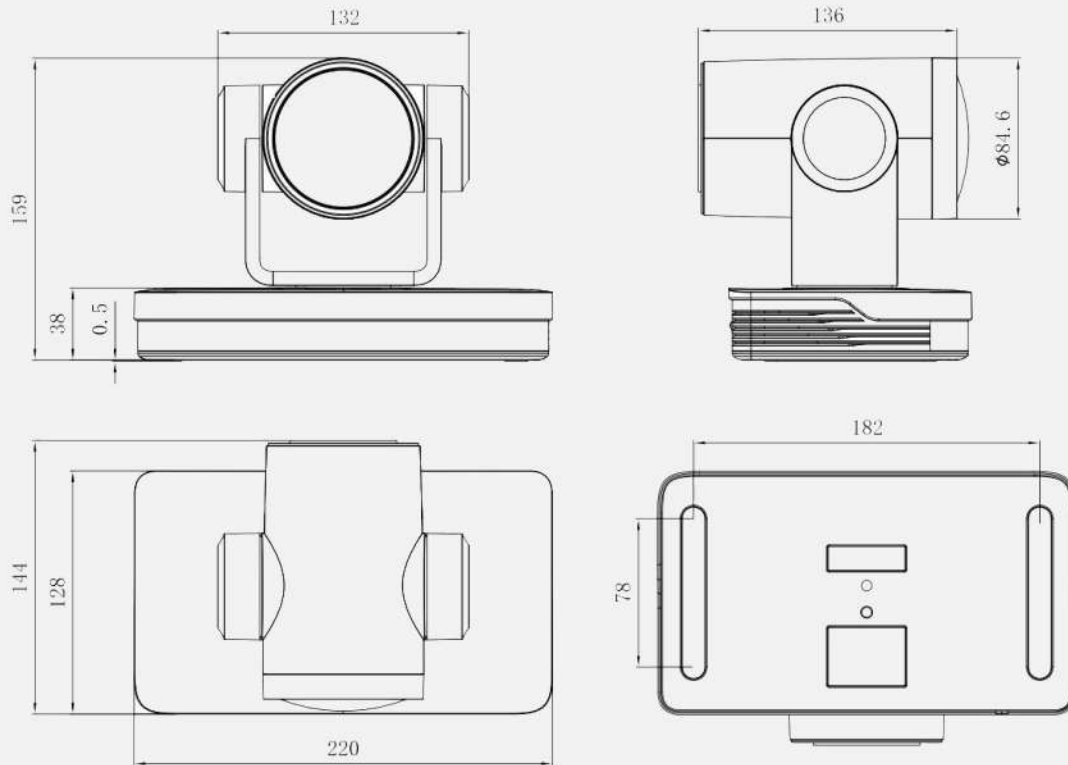

An ISO 9001:2008 Company

TEAM INFOVISION PVT.LTD.

70/B-19, Second Floor, Rama Road Industrial Area, New Delhi-110015
 Ph. : 011-42133102, Fax : 91-41845331
 Email : ajay@teaminfovision.com, tarun@teaminfovision.com
 Website : www.teaminfovision.com

Distributor Network / Service Centre

- Ahmedabad • Akola • Allahabad • Bareilly • Bhopal • Bhubneshwar
- Chandigarh • Chennai • Goa • Guwahati • Hyderabad • Imphal
- Indore • Jabalpur • Jalandhar • Jammu • Jamnagar • Jamshedpur
- Jhansi • Jorhat • Kanpur • Kashmir • Kolkata • Lucknow • Ludhiana
- Pune • Raipur • Silliguri • Srinagar-Uttarakhand • Varanasi