

AH 7020HU SERIES HD VIDEO CONFERENCE CAMERA



AH 7020HU SERIES HD VIDEO CONFERENCE CAMERA





Full HD, Wide View Angle, Multi-protocols, Multiple Video Interfaces.

The AH 7020HU series camera offers perfect functions, superior performance and rich interfaces. The features include advanced ISP processing algorithms to provide vivid images with a strong sense of depth, high resolution, and fantastic color rendition. It supports H.264/H.265 encoding which makes motion video fluent and clear even under less than ideal bandwidth conditions.

Technical Specifications

Model	AH 7020 HU		
View Angle	3.3° (Tele)-54. 7°(Wide)	Iris/Electronic Shutter:	Auto/Manual
Iris	F 1.6-F 3.5, R=5.5~110mm	Focus	Auto/Manual
Sensor	1/2.8inchhigh quality HD CMOS sensor	BLC	ON/OFF
Effective Pixels	2.07MP,16: 9	WDR	OFF/ Dynamic level adjustment
Optical Zoom	20X	Video Adjustment	Brightness, Color, Saturation, Contrast, Sharpness, B/W mode, Gamma curve
Digital Zoom	16X	SNR	>55dB
Minimum Illumination	0.1Lux (F1 .8, AGC ON)		
DNR	2D&3D DNR		
White Balance	Auto/ Manual/ One Push/ 3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7K		
Video Interfaces	1 x USB 2.0, 1 x USB 3.0, 1 x LAN 1x RS232, 1 x HDMI	Video Format	USB2.0 interface video format: 176x144/320x240/320x1801 352x288/640x480/720x480/720x576l640x360800X600/960X540/1024X576l1024X768l1280X 7201 1920X1080P30/25/20115/10/5
Video Compression Format	H.264, H.265, Dual stream Output	USB3.0:	1920X1080P60/50/30/25, 1280X720P30/25115110, 960X540P30, 640X360P30,800X600P30
Control Protocol	VISCA/Pelco-D/Pelco-P, Baud Rate· 115200 /9600 /4800/2400bps	HDMI/HD Base video format;	1080P60150/30/25/59.94/29.97, 1080160/50/59.94,720P60/50130/25/59.94/29.97
Resolution	Full HD		
Audio Compression Format	AAC/MP3 Audio		
LAN Port	100M IP port (1 00BASE-TX), Support VISCA protocol control through IP port.		
Network Protocol	RTSP, RTMP, ONVIF, GB/T28181	Power Adapter:	AC110V-AC220V to DC12V/1.5A
Power Interface	HEC3800 outlet (DC12V)	Dimension	150mmX150mmX167.5mm
Pan/Tilt Rotation	±170°, -30° +90°	Weight	1.4KG
Pan Control Speed	0.1 ~60°/sec	Remote Operation (IP)	Remote Upgrade. Reboot and Reset
Tilt Control Speed	0.1 ~30°/sec		
Preset Speed	Pan: 60°/sec, Tilt 30°/sec		
Preset Number	255 presets (10 presets by remote controller)		

Dimension(mm):

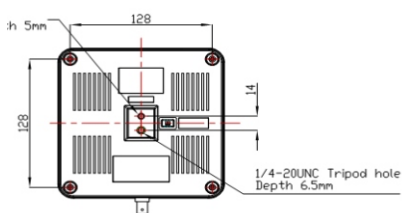

Authorized Dealers:

