

AN7020NDI SERIES HD VIDEO CONFERENCE CAMERA



AN7020NDI SERIES HD VIDEO CONFERENCE CAMERA


Full HD, Wide View Angle, Multi-protocols, Multiple Video Interfaces.

The AN7020NDI series camera offers perfect functions, superior performance and rich interfaces. The features include advanced ISP processing algorithms to provide vivid images with a strong sense of depth, high resolution, and fantastic color rendition. It supports H.264/H.265 encoding which makes motion video fluent and clear even under less than ideal bandwidth conditions.

Technical Specifications

View Angle	3.3° (Tele)-54. 7°(Wide)	Iris/Electronic Shutter:	Auto/Manual
Iris	F1.6-F3.5, R=5.2~99mm	Focus	Auto/Manual/One Push
Sensor	1/2.8 inch high quality HD CMOS sensor	BLC	ON/OFF
Effective Pixels	2.07MP,16: 9	WDR	OFF/ Dynamic level adjustment
Optical Zoom	20X	Video Adjustment	Brightness, Color, Saturation, Contrast,Sharpness, B/W mode, Gamma curve
Digital Zoom	10X	SNR	>55dB
DNR	2D&3D DNR	Minimum Illumination	0.5Lux (F1 .8, AGC ON)
White Balance	Auto/ Manual/ One Push/ 3000K/3500K/4000K/4500K/ 5000K/5500K/6000K/6500K/ 7000K		
Video Interfaces	USB2.0, LAN, RS232(Ring through RS232 output), NDI	Video Format	USB2.0 interface video format: 176x144/320x240/320x180/ 352x288/640x480/720x480/720x576/640x360/800X600/ 960X540/1024X576/1024X768/1280X 720/ 1920X1080P30/25/20115/10/5
Video Compression Format	H.2 64, H 265, Dual stream output		
Control Protocol	VISCA/Pelco-D/Pelco-P, Baud Rate: 115200/9600/ 4800/2400		
Audio Input Interface	Double track 3.5mm linear input		
Audio Compression Format	AAC/MP3 Audio compress ion/ G. 711A		
LAN Port	100M IP port(100BASE-TX), Support VISCA protocol through IP port.		
control	RTSP, RTMP, ONVIF, NDI		
Network Protocol	GB/T28181		
Power Interface	HEC3800 outlet (DC12V)		
Pan/Tilt Rotation	±170°, -30°~ +90°	Power Adapter:	AC110V-AC220V to DC12V/1.5A
Pan Control Speed	0. 1 -60°/sec	Dimension	150mmX150mmX167.5mm
Tilt Control Speed	0.1 ~30°/sec	Weight	1.4KG
Preset Speed	Pan: 60°/sec, Tilt 30°/sec	Remote Operation (IP)	Remote Upgrade. Reboot and Reset
Preset Number	255 presets (10 presets by remote control)		

Dimension(mm):

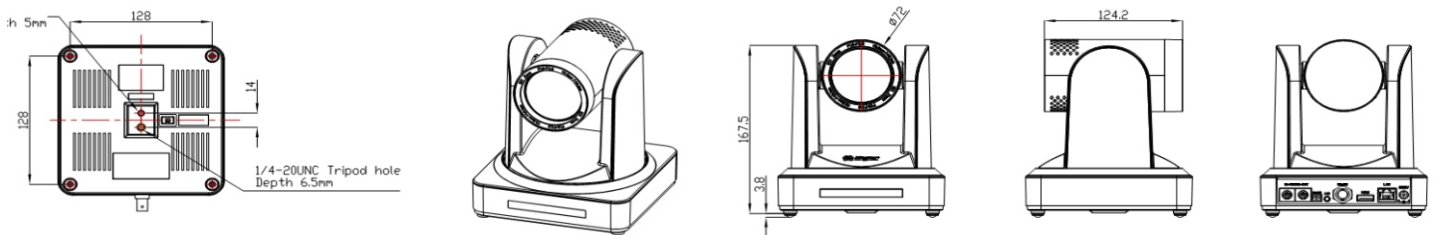

Authorized Dealers: