



HD VIDEO CONFERENCE CAMERA UV950A SERIES

UV950A

Multiple Optical Zoom Lens
Rich Video Interfaces



Advanced ISP Technology and Algorithm
Built in SD Card, SuperQuiet PTZ Rotation
Stable and Reliable, Perfect Compatibility
Convenient Installation and Maintenance



UV950A Series

Camera Parameter

Model:	UV950A-12	UV950A-20
Optical Zoom:	12X, f=3.9~46.8mm	20X, f=5.57~110mm
Iris:	F1.8 ~ F2.4	F1.6 ~ F3.5
View Angle:	6.3°(tele)--72.5°(wide)	3.3°(tele)--54.7°(wide)

Sensor:	1/2.8 inch high quality HD CMOS sensor
Effective Pixels:	16: 9 2.07 MP
Video Format:	DVI(HDMI)/SDI video format : 1080P60/50/30/25/59.94/29.97, 1080I60/50/59.94, 720P60/50/30/25/59.94/29.97 U3 interface video format: 1920X1080P60/50/30/25, 1280X720P60/50/30/25, 960X540P30,640X360P30, 640X480P30, 352X288P30, 960X540P30, 800X600P30, U3 compatible with U2: 960X540P30, 640X360P30, 1280X720P10/15, 720X576P50, 720X480P60, 640X480P30, 352X288P30, 800X600P30,
Minimum Illumination:	0.5Lux (F1.8, AGC ON)
DNR:	2D & 3D DNR
White Balance:	Auto / Manual/ One Push/ 3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K
Iris/Shutter:	Auto/Manual
Focus:	Auto/Manual/One Push
BLC:	ON/OFF
WDR:	OFF/ Dynamic level adjustment
Video Adjustment:	Brightness, Color, Saturation, Contrast, Sharpness, B/W mode, Gamma curve
SNR:	>55dB




Input/Output Interface

Audio/Video Interfaces:	UV950A-12/20-ST Model:3G-SDI, DVI(HDMI), LAN, RS232(IN/OUT), RS485, A-IN UV950A-12/20-U3 Model:USB3.0, DVI(HDMI), LAN, RS232(IN)
Video Compression Format:	H.264/H.265, Dual stream output
Control Signal Interface:	RS-232 Ring through RS232 output
Control Protocol:	VISCA/Pelco-D/Pelco-P, Baud Rate: 11520/9600/4800/2400
Audio Input Interface:	Dual track 3.5mm linear input,
Audio Compression Format:	AAC/MP3/G.711A
LAN Port:	100M IP port(100BASE-TX), 5G WiFi (optional), Support Visca protocol control through IP port.
Network Protocol:	RTSP/RTMP, ONVIF, GB/T28181
Power Interface:	HEC3800 outlet (DC12V)

PTZ Parameter

Pan Rotation:	±170°
Tilt Rotation:	-30°~+90°
Pan Control Speed:	0.1 ~ 100°/sec
Tilt Control Speed:	0.1~45°/sec
Preset Speed:	Pan: 100°/sec,Tilt: 45°/sec
Preset Number:	255 presets (10 presets by remote controller)
Power Adapter:	AC110V-AC220V to DC12V/1.5A
Dimension:	258mmX172mmX168mm
Weight:	1.54KG
Remote Operation (IP):	Remote Upgrade, Reboot and Reset

Order No.

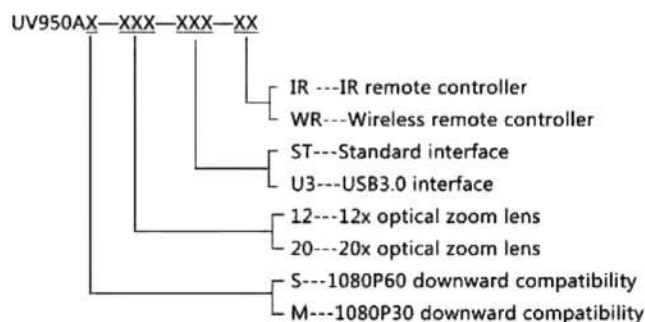

An ISO 9001:2008 Company



TEAM INFOVISION PVT.LTD.



70/B-19, Second Floor, Rama Road Industrial Area, New Delhi-110015

Ph. : 011-42133102, Fax : 91-41845331

Email : ajay@teaminfovision.com, tarun@teaminfovision.com

Website : www.teaminfovision.com

Distributor Network / Service Centre

- Ahemdabad • Akola • Allahabad • Bareilly • Bhopal • Bhubhneswar
- Chandigarh • Chennai • Goa • Guwahati • Hyderabad • Imphal
- Indore • Jabalpur • Jalandhar • Jammu • Jamnagar • Jamshedpur
- Jhasi • Jorhat • Kanpur • Kashmir • Kolkata • Lucknow • Ludhiana
- Pune • Raipur • Silliguri • Srinagar-Uttarakhand • Varanasi